



CFMOTO



WWW.CFMOTO.COM.AU



CFMoto ATVs are built with Aussies in mind – tough as nails and reliable, backed by a nationwide dealer network.

Already an established powersports manufacturer known the world over, CFMoto have hit our paddocks with a rugged range of ATVs designed for our harsh conditions. CFMoto ATVs are robust, reliable and downright practical workhorses. With selectable 2WD/4WD, Hi and Low range, independent suspension and much more coming as standard, you can forget about the kelpie - CFMoto ATVs will become your new best mate. CFMoto ATVs are fair dinkum when it comes to getting the job done, whether it be towing, carrying, mustering or herding.

CFMoto ATVs are built tough to take on the rough stuff us Aussies love to throw at our machinery. CFMoto is the real deal with over 20 years experience, turning steel to the tune of 600,000 vehicles a year. CFMoto is powered by a 1,300 strong work force focussed on developing the best products known to man.

The CFMoto philosophy is to build premium quality products that offer unbeatable value. We are not yanking your chain when we say that CFMoto ATVs are the best values ATVs on the market.

CFMoto machines are also supported by ripping warranty and after sales support, such as the 2-Year Warranty offered on most CFMoto ATVs. CFMoto - bloody tough, bloody reliable, bloody brilliant!

At the end of the day, we could talk until we're blue in the face about what CFMoto can offer you – but the best thing you can do is get down to your local dealer and book a demo ride. You'll find out soon enough that we're true to our word, and that our ATVs are as tough and reliable as the day is long.

For more information about the CFMoto range, please visit
www.cfmoto.com.au



CF500

FEATURES

Single Cylinder, 4 Stroke, 4 Valve 493cc engine (1)
Liquid Cooled with Mikuni Carburetor
Selectable 2WD/4WD with Electric Diff lock
Independent front and rear suspension
Front and rear disc brakes
Front and rear racks
Great storage/tool compartment
Engine Braking System
2500lbs Front winch (2)
Towing capacity- 350kg
Carrying capacity- 20kg front and 40kg rear
Indicators, horn and mirrors as standard

EXTERIOR COLOUR



Red



Blue



Army Green



(1)



(2)

Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	493
Power	35hp @6389 rpm
Bore & Stroke	87.5 x 82
Compression	10.2:1
Fuel System	Carburetor
Max Torque	38.8N.m/ 5500 rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric & recoil
Transmission	CVT H/L/N/R
Lubrication	Pressure & Splash

L X W X H	2120 x 1170 x 1230mm
Wheelbase	1290mm
Seat Height	900mm
Ground Clearance	275mm
Fuel Capacity	19L
Dry Weight	327kg

Suspension front	Double wishbone independent coil spring oil dampening
Suspension rear	Double wishbone independent coil spring oil dampening

Brakes front	Hydraulic double disc
Brakes rear	Hydraulic single disc
Towing Capacity	350kg
Carrying Capacity	20kg front/ 40kg rear



XS

FEATURES

Available in short wheel and long wheel base
Single Cylinder, 4-Stroke, 4 Valve 493cc engine
Liquid Cooled with Mikuni Carburetor
Selectable 2WD/4WD, L-H-N-R Range, with Lockable Diff ⁽¹⁾
12 inch polished alloy wheels with Innova tyres
Independent front and rear suspension
Front and rear disc brakes
Front and rear storage racks
Engine Braking System
Padded back rest ⁽³⁾
LED instrumental display
2500Lbs front winch
Towing Capacity- 350kg
Carrying Capacity- 35kg front and 70kg rear
Indicators, horn and mirrors as standard ⁽²⁾

EXTERIOR COLOUR



Red



Silver



(1)



(2)



(3)

Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	493
Power	35hp @6389 rpm
Bore & Stroke	87.5 x 82
Compression	10.2:1
Fuel System	Carburetor
Max Torque	38.8N.m/ 5500 rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric & recoil
Transmission	CVT H/L/N/R
Lubrication	Pressure & Splash

L X W X H	2100 x 900 x 1230mm (SWB) 2300 x 900 x 1230mm (LWB)
Wheelbase	1290mm/1490mm
Seat Height	900mm
Ground Clearance	275mm
Fuel Capacity	19L
Dry Weight	327kg

Suspension front	Double wishbone independent coil spring oil dampening
Suspension rear	Double wishbone independent coil spring oil dampening

Brakes front	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc
Towing Capacity	350kg
Carrying Capacity	35kg front/ 70kg rear



Overseas model shown



X6

FEATURES

Available in short wheel and long wheel base
Single Cylinder, 4-Stroke, 4 Valve 594cc engine
Liquid Cooled
Electronic Fuel Injection
Selectable 2WD/4WD, L-H-N-R range, with Lockable Diff
12 inch polished alloy wheels with Innova tyres
Aluminium double wishbone suspension
Independent adjustable front and rear suspension ⁽¹⁾
Front and rear storage racks
Engine Braking System
2500Lbs Front winch
Towing Capacity- 350kg
Carrying Capacity- 35kg front and 70kg rear
Indicators, horn and mirrors as standard


EXTERIOR COLOUR



Red



Silver

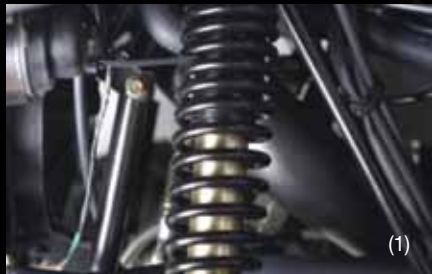

(1)



Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	594
Power	37hp @ 6300 rpm
Bore & Stroke	96 x 82
Compression	10:01
Fuel System	Electronic Fuel Injection
Max Torque	46.9N.m/ 5500 rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric & Recoil
Transmission	CVTech IBC variable H/L/N/R
Lubrication	Pressure & Splash
L X W X H	2100x1180x1230 (SWB) 2300x1180x1230 (LWB)
Wheelbase	1290mm/1490mm
Seat Height	900mm
Ground Clearance	275mm
Fuel Capacity	19L
Dry Weight	359kg
Suspension front	Double wishbone independent suspension
Suspension rear	Double wishbone independent suspension
Brakes front	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc
Towing Capacity	350kg
Carrying Capacity	35kg front/ 70kg rear



Overseas model shown



X8

FEATURES

- 4 Stroke, 4 Valve, V-Twin 800cc engine
- Liquid Cooled
- Electronic Fuel Injection
- Selectable 2WD/4WD L-H-N-R range, with Lockable Diff
- 14 inch aluminium wheels with Innova tyres
- Engine Braking System
- Independent adjustable front and rear suspension
- DNM gas charged absorbers
- Aluminium A-arm protectors
- Front and rear storage racks
- 3000Lbs Front winch
- Towing Capacity- 450kg
- Carrying Capacity- 50kg front and 100kg rear
- Electric power steering (optional)
- Indicators, horn and mirrors as standard

EXTERIOR COLOUR



Red



Silver



Specifications and colours are subject to change



ENGINE

Type	V-twin, 4 valves, 4 stroke
Displacement	800
Power	63.69 @ 6700 rpm
Bore & Stroke	96 x 82
Compression	10.3:1
Fuel System	Electronic Fuel Injection
Max Torque	72N.m/ 6300 rpm
Cooling System	Liquid
Ignition	ECU
Starting	Electric
Transmission	CVT H/L/N/R
Lubrication	Pressure & Splash

L X W X H	2320 x 1180 x 1400mm
Wheelbase	1490mm
Seat Height	900mm
Ground Clearance	275mm
Fuel Capacity	23L
Dry Weight	396kg

Suspension front	Dual A-arm
Suspension rear	Dual A-arm

Brakes front	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc
Towing Capacity	450kg
Carrying Capacity	50kg front/ 100kg rear



Overseas model shown



U500

FEATURES

- 4-Stroke, 4 Valve 493cc engine
- Liquid Cooled
- Selectable 2WD/4WD, L-H-N-R range, with Lockable Diff
- 12 inch polished alloy wheels with CST tyres
- Engine Braking System
- Independent adjustable front and rear suspension
- Rear tipping tray
- 2500Lbs Front winch
- Towing Capacity- 550kg
- Carrying Capacity- 150kg
- Roof and windscreen as standard
- Indicators, horn and mirrors as standard

EXTERIOR COLOUR



Red



Silver



Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	493
Power	32hp @ 6500 rpm
Bore & Stroke	87.5 x 82
Compression	10.2:1
Fuel System	Carburetor
Max Torque	24N.m/ 6500 rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric
Transmission	CVT H/L/N/R
Lubrication	Pressure & Splash
L X W X H	2880 x 1430x 1900mm
Wheelbase	1790mm
Ground Clearance	350mm
Fuel Capacity	27L
Dry Weight	554kg
Suspension front	Double wishbone independent suspension
Suspension rear	Double wishbone independent suspension
Brakes front	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc
Towing Capacity	550kg
Carrying Capacity	150kg



U600I

FEATURES

- 4-Stroke, 4 Valve 594cc engine
- Liquid Cooled
- Selectable 2WD/4WD, L-H-N-R range, with Lockable Diff
- Electronic Fuel Injection
- 12 inch polished alloy wheels with CST tyres
- Engine Braking System
- Independent adjustable front and rear suspension
- Rear tipping tray
- 2500Lbs Front winch
- Towing Capacity- 550kg
- Carrying Capacity- 150kg
- Roof and windscreen as standard
- Indicators, horn and mirrors as standard

EXTERIOR COLOUR

Red

Silver

Camo



Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	594
Power	38hp @6300rpm
Bore & Stroke	96 X 82mm
Compression	10:01
Fuel System	Electronic Fuel Injection
Max Torque	46.9N.m/5500rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric
Transmission	CVT H/L/N/R
Lubrication	Pressure & Splash
L X W X H	2880 x 1430 x 1900 mm
Wheelbase	1790 mm
Ground Clearance	350 mm
Fuel Capacity	27L
Dry Weight	554 kg
Suspension front	Double wishbone independent suspension
Suspension rear	Double wishbone independent suspension
Brakes front	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, double disc
Towing Capacity	550kg
Carrying Capacity	150kg



Z6R

FEATURES

- Single Cylinder, 4 Stroke, 4 Valves 594cc engine
- Liquid Cooled
- Electronic Fuel Injection
- Selectable 2WD/4WD, L-H-N-R range, with Lockable Diff
- 14 inch polished alloy wheels with CST tyres (1)
- Double wishbone suspension
- All round hydraulic disc brakes
- Engine Braking System
- Adjustable DNM Suspension
- Independent adjustable front and rear suspension
- Roof and windscreen as standard
- Spare wheel and tyre mounted to rear of roll cage
- 2500Lbs Front winch (2)
- Towing Capacity- 125kg
- Carrying Capacity- 100kg
- Indicators, horn and mirrors as standard

EXTERIOR COLOUR



White



Black



(2)



(1)



Specifications and colours are subject to change



ENGINE

Type	Single cylinder, 4 valves, 4 stroke
Displacement	594
Power	37hp @6300 rpm
Bore & Stroke	96 x 82
Compression	10:1
Fuel System	Electronic Fuel Injection
Max Torque	46.9N.m/ 5500 rpm
Cooling System	Liquid
Ignition	CDI
Starting	Electric
Transmission	CVTech IBC variable H/L/N/R
Lubrication	Pressure & Splash
L X W X H	2630 x 1320 x 1800mm
Wheelbase	1960mm
Ground Clearance	240mm
Fuel Capacity	27L
Dry Weight	450kg

Suspension front	Double wishbone independent suspension
Suspension rear	Double wishbone independent suspension

Brakes front	Hydraulic double disc braking
Brakes rear	Hydraulic double disc braking

Towing Capacity	125kg
Carrying Capacity	100kg



	CF500	X5	X6	X8
Type	Single cylinder, 4 valves, 4 stroke	Single cylinder, 4 valve, 4 stroke	Single cylinder, 4 valve, 4 stroke	V-twin, 4 valve, 4 stroke
Displacement	493	493 cc	594	799.6
Power	35hp @6389 rpm	35hp @6389 rpm	37hp @6300 rpm	63.69 @6700 rpm
Bore & Stroke	87.5 x 82	87.5 x 82mm	96 x 82	91x 61.5
Compression	10.2:1	10.2:1	10:1	10.3:1
Fuel System	Carburetor	Carburetor	E.F.I. (Bosch)	E.F.I. (Delphi)
Max Torque	38.8N.m/ 5500 rpm	38.8N.m/ 5500 rpm	46.9N.m/ 5500 rpm	72.0N.m/ 6300 rpm
Cooling System	Liquid	Liquid	Liquid	Liquid
Ignition	CDI	CDI	CDI	ECU
Starting	Electric & recoil	Electric & recoil	Electric & recoil	Electric
Transmission	CVT H/L/N/R	CVT H/L/N/RA	CVTech IBC variable H/L/N/R	CVT
Lubrication	Pressure & Splash	Pressure & Splash	Pressure & Splash	Pressure & Splash
L X W X H	2120 x 1170 x 1230mm	2100 x 900 x 1230mm (SWB) 2300 x 900 x 1230mm (LWB)	2100 x 1180 x 1230mm (SWB) 2300 x 1180 x 1230mm (LWB)	2310 x 1180 x 1400mm
Wheelbase	1290mm	1290mm /1490mm	1290mm/1490mm	1480mm
Seat Height	900mm	900mm	900mm	900mm
Ground Clearance	275mm	275mm	275mm	275mm
Fuel Capacity	19L	19L	19L	23L
Dry Weight	327kg	358kg	359kg	396kg
Suspension front	Double wishbone independent coil spring oil dampening	Double wishbone independent suspension coil spring oil damp shock absorber	Double wishbone independent suspension Nitrogen Gas Absorber	Dual A-arm
Suspension rear	Double wishbone independent coil spring oil dampening	Double wishbone independent suspension coil spring oil damp shock absorber	Double wishbone independent suspension Nitrogen Gas Absorber	Dual A-arm
Brakes front	Hydraulic braking, double disc	Hydraulic braking, double disc	Hydraulic braking, double disc	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc	Hydraulic braking, single disc	Hydraulic braking, single disc	Hydraulic braking, single disc
Towing Capacity	350kg	350kg	350kg	450kg
Carrying Capacity	20kg front/ 40kg rear	35kg front/ 70kg rear	35kg front/ 70kg rear	50kg front/ 100kg rear

	U500	U600i	Z6R
Type	Single cylinder, 4 valves, 4 stroke	Single cylinder, 4 valves, 4 stroke	Single cylinder, 4 valves, 4 stroke
Displacement	493	594	594
Power	32hp @6500 rpm	38hp @6300rpm	37hp @6300 rpm
Bore & Stroke	87.5 x 82	96 X 82mm	96x82
Compression	10.2:1	10:01	10:1
Fuel System	Carburetor	Electronic Fuel Injection	E.F.I. (Bosch)
Max Torque	38.8N.m/ 5500 rpm	46.9N.m/5500rpm	46.9N.m/ 5500 rpm
Cooling System	Liquid	Liquid	Liquid
Ignition	CDI	CDI	CDI
Starting	Electric	Electric	Electric
Transmission	CVT H/L/N/R	CVT H/L/N/R	CVTech IBC variable H/L/N/R
Lubrication	Pressure & Splash	Pressure & Splash	Pressure & Splash
L X W X H	2880 x 1430x 1900mm	2880 x 1430 x 1900 mm	2630 x 1320 x 1800mm
Wheelbase	1790mm	1790 mm	1960mm
Ground Clearance	350mm	350 mm	240mm
Fuel Capacity	27L	27L	27L
Dry Weight	554kg	554 kg	450kg
Suspension front	Double wishbone independent suspension	Double wishbone independent suspension	Double wishbone independent suspension with adjustable DNM coil spring oil damp shock absorber
Suspension rear	Double wishbone independent suspension	Double wishbone independent suspension	Double wishbone independent suspension with adjustable DNM coil spring oil damp shock absorber
Brakes front	Hydraulic braking, double disc	Hydraulic braking, double disc	Hydraulic braking, double disc
Brakes rear	Hydraulic braking, single disc	Hydraulic braking, double disc	Hydraulic braking, double disc
Towing Capacity	550kg	550kg	125kg
Carrying Capacity	150kg	150kg	100kg





CFMOTO

WWW.CFMOTO.COM.AU

Distributed in Australia by
Mojo Motorcycles
2/530 Boundary Rd
Derrimut, VIC 3030
ph: (03) 8363 1600
e: info@cfmoto.com.au

DEALER